

Univerzalni skidač remenica

2210/2A






Profili



Atributi proizvoda


- materijal: Premium Flex Plus ugljični alatni čelik
- u potpunosti poboljšani i ojačani
- površina: kromirana po ISO 1456:2009, srednji vijak bruniran
- za skidanje svih vrsta remenica (sa 2, 3, 4, 5, 6, 7, 8, 9 utora)
- Alat je dizajniran za demontažu pogonskih remenica sa žljebovima na čeonj strani. Alat demontira remenicu bez ikakvog rizika od oštećenja. Alat je podesiv za različite promjere remenica, jer su krakovi podešavajući.




	B	D	H	
621780	100	48 - 82	135	800

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.


Upotreba (pictures)




Krake izvlačača (3 kraka) postavljate u otvore remenice u skladu s brojem otvora na remenici. Npr.: ukoliko remenica ima 5 otvora, tri kraka postavljate u otvore izvlačača koji su obilježeni brojem 5




Postavite krake izvlačača u otvore remenice



Za pričvršćivanje izvlačača na remenicu okrećite vreteno u smjeru kazaljke na satu dok se izvlačač ne pričvrsti



Po završetku rada, uklonite izvlačač



Može se koristiti za...






Photo (pictures)

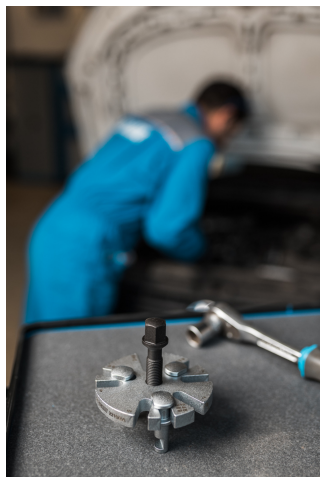

Accessories

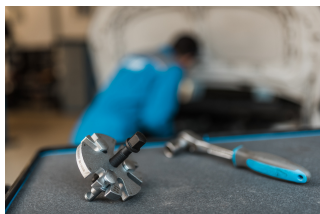

Univerzalni skidač remenica



Separator

Rezervni dijelovi



Vretno za 2210/2



Krak rezervni za 2210/2A

Safety (pictures)

