

# Universal timing pulley puller

2210/2A




## 프로파일



## 제품 특징


- material: premium flex plus carbon steel
- entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009, screw blackened
- for removing all types of pulleys with 2, 3, 4, 5, 6, 7, 8, 9 slots
- This tool is designed for removing drive pulleys with face grooves. The tool removes a pulley absolutely free of any risk of damage. The tool is adaptable to different pulley diameters, as the legs are adjustable.




	<b>B</b>	<b>D</b>	<b>H</b>		
621780	100	48 - 82	135	800	Till end of the stock

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.


### 사용법 (사진)




Insert the puller legs (3x) into the slots of the pulley regarding the number of pulley slots. For example: if the pulley has 5 openings, insert the puller legs (3x) into all slots with number sign 5.




Insert puller legs into openings of pulley.




Turn spindle clockwise until pulley comes off.




When finished working, remove puller.



Can be used for ...



### 사진 (사진)

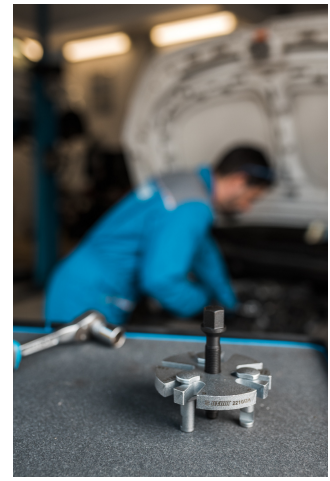

## 액세서리



Timing pulley puller



Separator puller

## 스페어 파트



Spindle for 2210/2

## 안전 (사진)

