

Universal timing pulley puller

2210/2A




Profielen



Product attributen


- materiaal: premium flex plus carbonstaal
- entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009, screw blackened
- for removing all types of pulleys with 2, 3, 4, 5, 6, 7, 8, 9 slots
- This tool is designed for removing drive pulleys with face grooves. The tool removes a pulley absolutely free of any risk of damage. The tool is adaptable to different pulley diameters, as the legs are adjustable.



	B	D	H		
621780	100	48 - 82	135	800	Till end of the stock


* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)




Insert the puller legs (3x) into the slots of the pulley regarding the number of pulley slots.


For example: if the pulley has 5 openings, insert the puller legs (3x) into all slots with number sign 5.




Insert puller legs into openings of pulley.



Turn spindle clockwise until pulley comes off.



When finished working, remove puller.



Kan gebruikt worden voor...





Foto (Afbeeldingen)



Accessoires

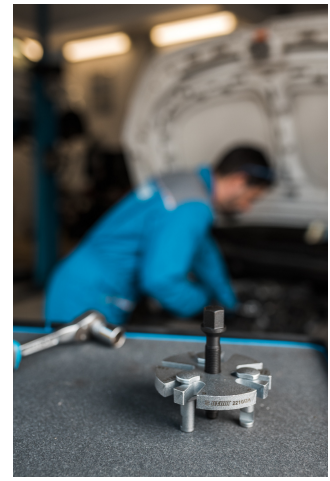

Timing pulley puller



Schoteltrekker-sortiment

Onderdelen



Spindle for 2210/2

Veiligheid (Afbeeldingen)

