

# Centraruote - per uso professionale.

1689



## Profili

---



## Attributi del prodotto

We redesigned many of its features. The base has been made stronger for improved precision and we also added conical one-size-fits-all magnetic thru-axles adapters that can be stored anywhere on the base. The arms have been made longer to accommodate 29+ wheels better and the calipers widened accordingly. Threads, springs and bearings were all revised resulting in smoother operation plus less frequent calibration. Additionally, we include white high-gloss stickers you can apply to the base and caliper arm to improve background contrast, making it easier than ever to use.

Here is a full list of the improvements.


- Stronger base for improved precision
- Longer and redesigned upright arms for improved clearance of 29+ wheels and truing precision
- Wider calipers for increased clearance of 29+ wheels
- Accommodates wider axles, works with through axle hubs up to 197mm width (include the use of adapters). Max. arm opening 230mm (without the use of adapters).
- New bearings on the upright arm adjust axle are spring loaded for improved precision and reduced frequency of calibration
- Redesigned caliper tips for easier radial truing
- Revised threads and springs for smoother operation
- 8mm bench mount holes at the bottom, 268 mm center to center
- Slicker design, all black
- Comes with conical magnetic through axle adapters – one size fits all (12, 15 and 20). The adapters are now magnetic and can be affixed anywhere on the base. Features a bolt for more permanent fix on the upright arms.
- Includes white high gloss stickers, covering the base and caliper arm, for improved background contrast (stickers are not preapplied)

Compatibility:

- Accepts wheels from 16 to 29+ inch with or without tire.
- Supports solid, quick release and through axle hubs
- Through axle hubs are supported with use of the adapters (included with truing stand)
- One pair of through axle adapters support all sizes of through axles

Standard features (same as before):

- La geometria dei riscontri permette un simultaneo controllo assiale per una accurata centratura della ruota.
- I calibri hanno estremità rivestite in plastica onde evitare di lasciare segni sulla ruota.
- I due bracci verticali si spostano velocemente agendo sul pomello per adattarli alla battuta del mozzo. Il braccio di riscontro si può regolare per adattarsi al diametro della ruota così come i due riscontri laterali si regolano in base alla larghezza del cerchio.
- Quando si cambia la ruota da verificare, i bracci verticali e il braccio di riscontro possono esser velocemente allontanati e riportati in posizione quando si inserisce la nuova ruota. Questo permette di centrare velocemente molte ruote con la stessa misura.

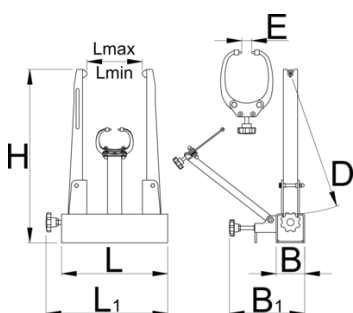



D↑

E↑

L↓

L↑

H

L

L1



629297

390

40

40

226

485



298

342

7165

\* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

## Utilizzo (pictures)



## Accessories




Calibro di riscontro per 1689




Riscontro per disco freno per 1689




Adattatore per ruote con perno passante da 20 mm.

 Adattatore per centraruote per Cannondale Lefty®

 Ganasce per ruote Fat per centraruote

 Pro Truing Stand Wooden Base

## Parti di ricambio

 Punta di ricambio per calibro

 Impugnatura per 1689