

Centraruote - per uso professionale.

1689



Profili



Attributi del prodotto

We redesigned many of its features. The base has been made stronger for improved precision and we also added conical one-size-fits-all magnetic thru-axles adapters that can be stored anywhere on the base. The arms have been made longer to accommodate 29+ wheels better and the calipers widened accordingly. Threads, springs and bearings were all revised resulting in smoother operation plus less frequent calibration. Additionally, we include white high-gloss stickers you can apply to the base and caliper arm to improve background contrast, making it easier than ever to use.

Here is a full list of the improvements.


- Stronger base for improved precision
- Longer and redesigned upright arms for improved clearance of 29+ wheels and truing precision
- Wider calipers for increased clearance of 29+ wheels
- Accommodates wider axles, works with through axle hubs up to 197mm width (include the use of adapters). Max. arm opening 230mm (without the use of adapters).
- New bearings on the upright arm adjust axle are spring loaded for improved precision and reduced frequency of calibration
- Redesigned caliper tips for easier radial truing
- Revised threads and springs for smoother operation
- 8mm bench mount holes at the bottom, 268 mm center to center
- Slicker design, all black
- Comes with conical magnetic through axle adapters – one size fits all (12, 15 and 20). The adapters are now magnetic and can be affixed anywhere on the base. Features a bolt for more permanent fix on the upright arms.
- Includes white high gloss stickers, covering the base and caliper arm, for improved background contrast (stickers are not preapplied)

Compatibility:

- Accepts wheels from 16 to 29+ inch with or without tire.
- Supports solid, quick release and through axle hubs
- Through axle hubs are supported with use of the adapters (included with truing stand)
- One pair of through axle adapters support all sizes of through axles

Standard features (same as before):

- La geometria dei riscontri permette un simultaneo controllo assiale per una accurata centratura della ruota.
- I calibri hanno estremità rivestite in plastica onde evitare di lasciare segni sulla ruota.
- I due bracci verticali si spostano velocemente agendo sul pomello per adattarli alla battuta del mozzo. Il braccio di riscontro si può regolare per adattarsi al diametro della ruota così come i due riscontri laterali si regolano in base alla larghezza del cerchio.
- Quando si cambia la ruota da verificare, i bracci verticali e il braccio di riscontro possono esser velocemente allontanati e riportati in posizione quando si inserisce la nuova ruota. Questo permette di centrare velocemente molte ruote con la stessa misura.

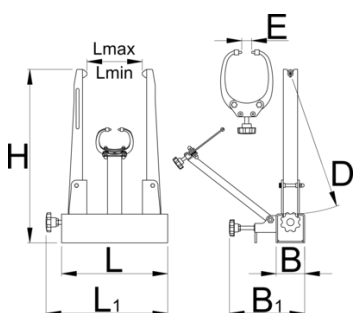



D↑

E↑

L↓

L↑

H

L

L1



629297

390

40

40

226

485



298

342

7165

* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

Utilizzo (pictures)



Accessories




Calibro di riscontro per 1689




Riscontro per disco freno per 1689




Adattatore per ruote con perno passante da 20 mm.

 Adattatore per centraruote per Cannondale Lefty®

 Ganasce per ruote Fat per centraruote

 Pro Truing Stand Wooden Base

Parti di ricambio

 Punta di ricambio per calibro

 Impugnatura per 1689