

Стојалка за центрирање тркало, за професионална употреба

1689



Profiles



Product features

We redesigned many of its features. The base has been made stronger for improved precision and we also added conical one-size-fits-all magnetic thru-axles adapters that can be stored anywhere on the base. The arms have been made longer to accommodate 29+ wheels better and the calipers widened accordingly. Threads, springs and bearings were all revised resulting in smoother operation plus less

frequent calibration. Additionally, we include white high-gloss stickers you can apply to the base and caliper arm to improve background contrast, making it easier than ever to use.

Here is a full list of the improvements.


- Stronger base for improved precision
- Longer and redesigned upright arms for improved clearance of 29+ wheels and truing precision
- Wider calipers for increased clearance of 29+ wheels
- Accommodates wider axles, works with through axle hubs up to 197mm width (include the use of adapters). Max. arm opening 230mm (without the use of adapters).
- New bearings on the upright arm adjust axle are spring loaded for improved precision and reduced frequency of calibration
- Redesigned caliper tips for easier radial truing
- Revised threads and springs for smoother operation
- 8mm bench mount holes at the bottom, 268 mm center to center
- Slicker design, all black
- Comes with conical magnetic through axle adapters – one size fits all (12, 15 and 20). The adapters are now magnetic and can be affixed anywhere on the base. Features a bolt for more permanent fix on the upright arms.
- Includes white high gloss stickers, covering the base and caliper arm, for improved background contrast (stickers are not preapplied)

Compatibility:

- Accepts wheels from 16 to 29+ inch with or without tire.
- Supports solid, quick release and through axle hubs
- Through axle hubs are supported with use of the adapters (included with truing stand)
- One pair of through axle adapters support all sizes of through axles

Standard features (same as before):

- Формата на контролникот овозможува истовремена радијална контрола на отстапувањето на центрираноста на обрачот на велосипедот
- Контролникот има пластично обложени врвови за да заштитат од оштетување на бојата на велосипедот
- Ширината на потпирачот може да се прилагодува така да одговара на големината на осовините на тркалата. Исто така е прилагодлива и висината на контролникот, за да може да се прилагоди сопречникот на тркалото
- При промена на тркало, федерот поставен на исправената стојалка и онаа со мерка може брзо да се извлече, автоматски затегнувајќи го наназад во почетна позиција кога се монтира ново тркало. Овозможува побрзо центрирање на неколку тркала со иста големина.

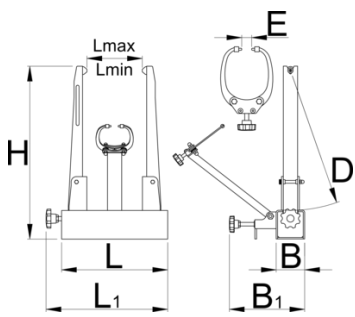

629297

390

40

40

226

485




298

342

7165

* Сликите на производите се симболични. Сите димензии се во мм, тежината е во грамови. Сите наведени димензии може да се разликуваат во ниво на толеранција

Usage (pictures)

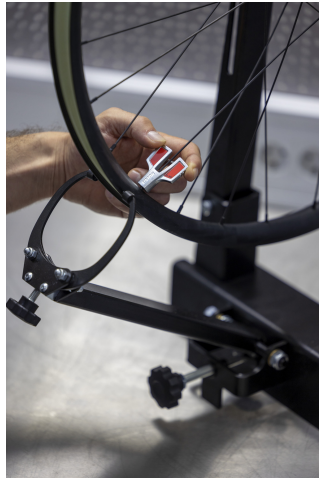

Accessories



Контролник за стојалка за 1689



Контролник за сопирачка за 1689



Адаптер за осовина на тркало од 20mm



Адаптер Cannondale Lefty® за постоље за центрирање на тркала



Шестар за тркало за Fat bikes



Pro Truing Stand Wooden Base

Spare parts



Резервен чеп за мерач (шестар)



Рачка за 1689