

Nástrčná hlavice 1" IMPACT prodloužená

233/4L6p




Profily



Vlastnosti produktu

- materiál: Premium Flex Plus uhlíková ocel
- postupově kované, zcela tvrzeno a temperováno
- Povrchová úprava: černé provedení dle DIN12476
- Vyrobeno dle normy ISO 2725-2 a DIN 3129

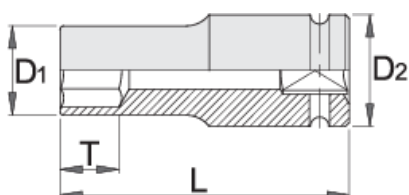





D1

D2

L

T



		D1	D2	L	T		
616771	22	40	54	100	21	879	Till end of stock
616772	24	42	54	100	21	921	
616773	27	46	54	100	24	1012	
616774	30	50	54	100	24	1075	
616775	32	52	54	100	24	1090	
616776	33	53	54	100	24	1109	
616777	34	55	54	100	40	1162	
616778	36	56	54	100	65	1207	
616779	38	59	54	100	65	1222	
616780	41	63	54	100	64	1367	
616781	42	64	54	100	64	1380	
616782	46	69	54	100	63	1613	
616783	50	74	54	100	62	1793	
616784	55	80	54	100	60	1976	
616785	60	86	54	120	78	2726	
616786	65	92	54	125	80	3192	
616787	70	99	54	125	80	3595	
616788	75	104	86	135	85	4512	
616789	80	109	86	135	85	5532	

* Obrázky produktů jsou symbolické. Všechny rozměry jsou v mm a hmotnost v gramech. Všechny uvedené rozměry se mohou lišit v toleranci.

Bezpečnost (obrázky)

