

Impact socket 1", long type, 6 point

233/4L6p




Profiles





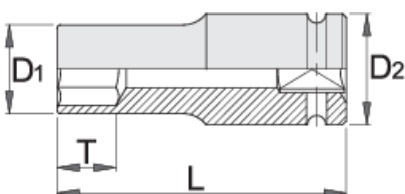

Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: phosphated to standard ISO 9717
- made according to standard ISO 2725-2 and DIN 3129



| Barcode | mm | D1 | D2 | L | T | Icon | Icon |
|---------|----|----|----|-----|----|------|------|
| 616772 | 24 | 42 | 54 | 100 | 21 | 921 | |
| 616773 | 27 | 46 | 54 | 100 | 24 | 1012 | |

|  |  | D1 | D2 | L | T |  |  |
|---|--|-----|----|-----|----|--|--|
| 616774 | 30 | 50 | 54 | 100 | 24 | 1075 | |
| 616775 | 32 | 52 | 54 | 100 | 24 | 1090 | |
| 616776 | 33 | 53 | 54 | 100 | 24 | 1109 | |
| 616777 | 34 | 55 | 54 | 100 | 40 | 1162 | |
| 616778 | 36 | 56 | 54 | 100 | 65 | 1207 | |
| 616779 | 38 | 59 | 54 | 100 | 65 | 1222 | |
| 616780 | 41 | 63 | 54 | 100 | 64 | 1367 | |
| 616781 | 42 | 64 | 54 | 100 | 64 | 1380 | |
| 616782 | 46 | 69 | 54 | 100 | 63 | 1613 | |
| 616783 | 50 | 74 | 54 | 100 | 62 | 1793 | |
| 616784 | 55 | 80 | 54 | 100 | 60 | 1976 | |
| 616786 | 65 | 92 | 54 | 125 | 80 | 3192 | |
| 616787 | 70 | 99 | 54 | 125 | 80 | 3595 | |
| 616788 | 75 | 104 | 86 | 135 | 85 | 4512 | |
| 616789 | 80 | 109 | 86 | 135 | 85 | 5532 | |

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

Safety (pictures)

