

Steekringsleutel IBEX

129/1



Profielen




Product attributen

- materiaal: premium chroom vanadium staal
- gesmeed, volledig gehard en getemperd
- surface finish: trivalent chrome plated according to ISO 1456:2009
- gepolijste kop
- ring part with LIFE profile

Voordelen:

- The wrench acts on the flats to protect the corners of the nut
- 3 drive surface for greater power
- 100% positioning of the wrench
- rewind action without removing the wrench

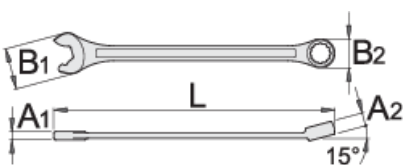

611763



10

L

160

B2

15.9

B1

23

A2




7.5

A1

4.2




37


		L	B2	B1	A2	A1	
611764	11	174	17.8	24.5	8	4.5	43
611765	12	183	19.4	26.5	8.5	4.7	54
611767	14	206	22	31.5	9	5.2	75
611768	15	217	23.2	33.5	9.5	5.7	93
611769	16	227	24.8	36	10.5	6.2	114
611770	17	238	26.1	38	10.5	6.7	131
611930	18	250	28	40	11	7.2	155
611771	19	261	29.3	42	12	7.2	173
611772	22	296	34.1	46.5	13	8.2	258
611773	24	321	37.3	52.5	14	8.5	321

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.


Gebruik (Afbeeldingen)




Enables 3-time faster work in comparison to standard combination wrench.



100% positioning of the wrench



3 drive surface for greater power



LIFE-profiel