

Wykrętak do usuwania urwanych śrub

778/4









Profile

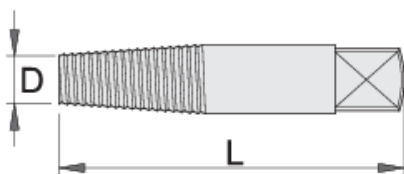

Cechy produktu

- do wykręcania pękniętych śrub i szpilek bez ryzyka uszkodzenia gwintu
- materiał: stal chromo- wanadowa premium
- olejowo utwardzane i odpuszczane
- czerniony



	N ^o	D		L	 mm	 mm	
616812	1	1.75	2,7	50	M3 - M6	2.5	9
616813	2	2.2	3,8	57	M6 - M8	3.0	13
616814	3	3.3	4,9	64	M8 - M11	4.5	19
616815	4	4.75	7,0	71	M11 - M14	6.0	33
616816	5	6.35	9,0	78	M14 - M18	8.0	53
616817	6	9.5	12,0	85	M18 - M24	11	102

* Przedstawiony wygląd produktu jest orientacyjny. Wszystkie wymiary są w mm, podana waga w gramach