

Kaçavidë kryq (PH) CR

615CR



Profiles




Standards

ISO 8764-1,2

Product features

- teh: çeliku krom-molibden vanadium-, thekur tërësisht dhe nevrik
- krom kromuar teh, pikut nxirë
- trajtuar: formë ergonomik
- trajtuar polipropilen
- varur vrimë
- bërë sipas standardit ISO 8764-1,2
- bërë sipas standardit DIN 5260-PH



	+	C	L	D	1
616363	PH 0	60	145	3	34
616364	PH 1	80	165	4.5	60

	+	С	L	D	1	
616365	PH 1	200	285	4.5	74	
616366	PH 2	100	200	6	94	
616367	PH 2	150	250	6	104	
616368	PH 3	150	260	8	154	
616369	PH 4	200	320	10	230	

* Imazhet e produkteve janë simbolike. Të gjitha dimensionet janë në mm, pesha në gram. Të gjitha dimensionet e listuara mund të ndryshojnë në tolerancë.

Safety tips



• Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.

• Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.

• A rounded tip should be redressed with a file; make sure edges are straight.

• Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.

• Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.

• A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade might break and send a particle of steel into the operator's arm or even towards his eyes.




• Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.

• Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.

• Don't use a screwdriver with a split or broken handle.

• Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.

Safety (pictures)

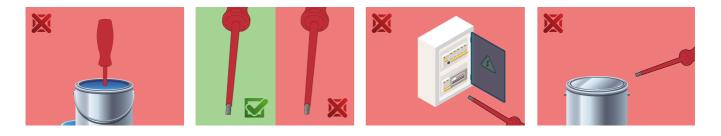

Frequently asked questions

Can you hit the screwdriver? No, you should not hit the screwdriver.

Can a screwdriver with a PH tip be used for PZ cross head screws? Its use is not recommended as this can cause damage to the screw.