# Насаден клуч со рачка CR изведба

629CR
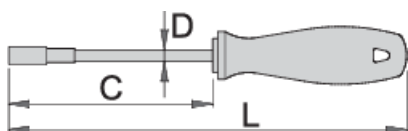
Profiles

Product features

- врв од: специјален хард хром ванадиум челик, целосно зајакнат и кален
- стебло на одвртка хромирано, врв појачан
- рачка: ергономска форма
- рачка - полипропилен
- отвор во рачката за закачување
- изработено по стандард DIN 3125

	mm	C	L	D		
616404	4	125	225	5	73	Till end of stock
616406	5	125	225	5,2	92	Till end of stock
616407	5.5	125	225	5,2	103	Till end of stock
616408	6	125	225	5,2	76	
616409	7	125	235	6,2	103	

|||||	(mm)	C	L	D	👤	🕐
616410	8	125	235	6,2	107	
616411	10	125	235	8,2	112	
616413	12	125	245	9,2	184	Till end of stock
616414	13	125	245	9,2	173	
616415	14	125	245	9	193	Till end of stock
616418	17	125	245	9	210	Till end of stock

* Сликите на производите се симболични. Сите димензии се во мм, тежината е во грамови. Сите наведени димензии може да се разликуваат во ниво на толеранција

Safety tips

✅

● Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.

● Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.

● A rounded tip should be redressed with a file; make sure edges are straight.

● Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.

● Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.

● A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade might break and send a particle of steel into the operator's arm or even towards his eyes.

❌

● Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.

● Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.

● Don't use a screwdriver with a split or broken handle.

● Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.