

Одвртувач плоснат NI

605NI



Profiles

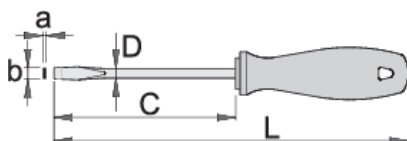


Standards




ДИН 5265, 605/НИ Плоснат одвртувач ИСО 2380-1,
2

Product features

- врв од: специјален хард хром ванадиум челик, целосно зајакнат и кален
- никлувано стебло
- рачка: ергономска форма
- рачка-полипропилен
- отвор во рачката за закачување
- изработена според стандардот DIN ISO 2380-1: 2006 и DIN ISO 2380-2: 2006



|  | axb | C | L | D |  |  |
|--|-----------|----|-----|-----|---|---|
| 616419 | 0.4 x 2.0 | 60 | 145 | 2 | 33 | |
| 616420 | 0.4 x 2.5 | 75 | 160 | 2.5 | 34 | Till end of stock |

|  | axb | C | L | D |  |  |
|--|------------|-----|-----|-----|---|---|
| 616421 | 0.5 x 3.0 | 80 | 165 | 3 | 35 | |
| 616422 | 0.6 x 3.5 | 100 | 185 | 3.5 | 39 | Till end of stock |
| 616423 | 0.8 x 4.0 | 100 | 185 | 4 | 41 | |
| 616424 | 1.0 x 5.5 | 125 | 225 | 5 | 70 | |
| 616425 | 1.2 x 6.5 | 150 | 250 | 6 | 103 | |
| 616426 | 1.2 x 8.0 | 175 | 285 | 7 | 143 | |
| 616427 | 1.6 x 10.0 | 200 | 320 | 8 | 173 | |

* Сликите на производите се симболични. Сите димензии се во мм, тежината е во грамови. Сите наведени димензии може да се разликуваат во ниво на толеранција

Safety tips



- Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.
- Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.
- A rounded tip should be redressed with a file; make sure edges are straight.
- Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.
- Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.
- A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade might break and send a particle of steel into the operator's arm or even towards his eyes.



- Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.
- Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.
- Don't use a screwdriver with a split or broken handle.
- Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.

Safety (pictures)

