

# Llave de vaso con mango, aislado

629VDETBI



## Perfiles




## Normas

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Características del producto

- hoja: acero al cromo vanadio de alta calidad, totalmente endurecido y templado
- Mango ergonómico
- material tricomponente
- agujero para colgar
- fabricada de acuerdo con la norma DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018
- fabricado según normas DIN 3125




Barcode	mm	C	L	Weight	Time
616464	5.5	125	225	80	
616465	6	125	225	82	

	mm	C	L		
616466	7	125	235	112	
616467	8	125	235	116	
623341	9	125	235	124	Till end of stock
616468	10	125	235	122	
623342	11	125	235	159	Till end of stock
616469	13	125	245	179	
623445	14	125	245	166	Till end of stock

\* Las imágenes de los productos son simbólicas. Todas las dimensiones son en mm, peso en gramos.

## Empleo (imágenes)

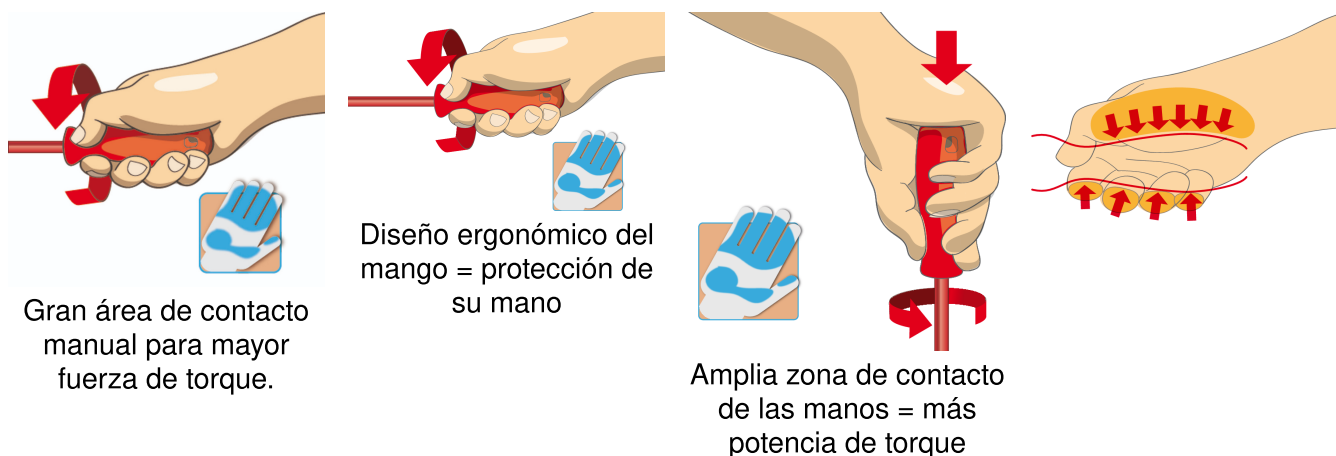

## Consejos de seguridad



- Las herramientas VDE que tienen varias partes, deben ensamblarse correctamente antes de su uso.
- Cuando trabaje con herramientas VDE, evite el contacto con el agua.



- No use herramientas que muestren signos de desgaste y que tengan la segunda capa de plástico visible.

## Preguntas frecuentes

### Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

### Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.