

Szigetelt dugókulcsos csavarhúzó VDE TBI markolattal

629VDE TBI



Profilok




Szabványok

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Termékjellemzők

- szár: Premium Hard króm-vanádium acél, teljes anyagában nemesített
- markolat: ergonomikus kialakítású
- háromkomponensű műanyag markolat
- függeszthető
- DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018 szabvány szerint
- DIN 3125 szabvány szerint



616464



5.5



125



225




80



					
616465	6	125	225	82	
616466	7	125	235	112	
616467	8	125	235	116	
623341	9	125	235	124	Till end of stock
616468	10	125	235	122	
623342	11	125	235	159	Till end of stock
616469	13	125	245	179	
623445	14	125	245	166	Till end of stock

* A termékeképek illusztrációk. Minden feltüntetett méret milliméterben, a tömegek grammokban. Az összes feltüntetett méret eltérhet a toleranciának megfelelően.

Használat (pictures)

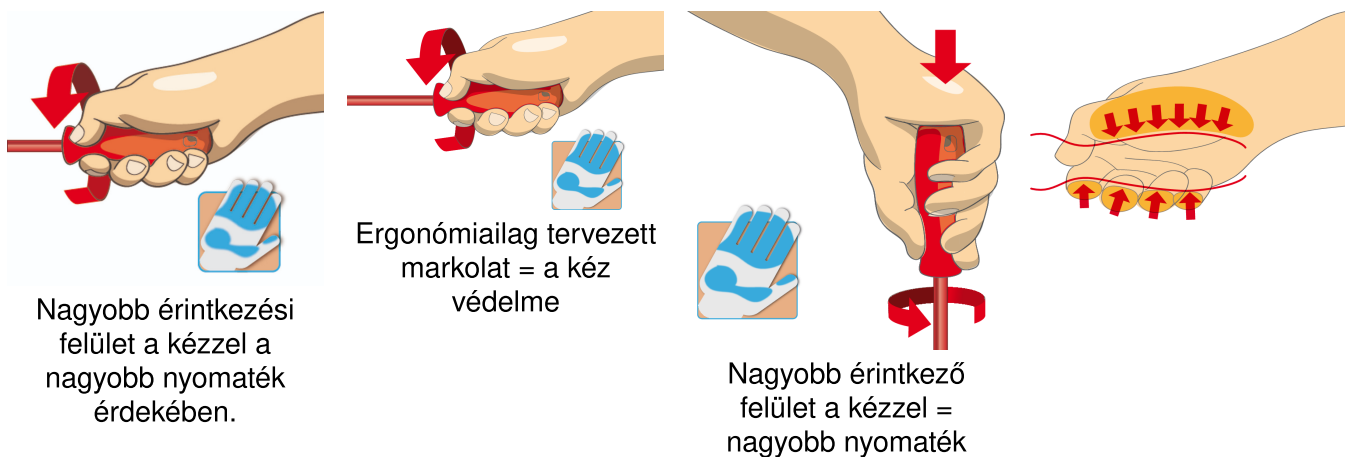

Safety tips



- VDE tools that have several parts, have to be assembled correctly before use.
- When working with VDE tools avoid contact with water.



- Don't use tools that shows sign of wear and have the second layer of plastic visible.

Frequently asked questions

Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.