

Chiave a bussola isolata con impugnatura VDE TBI

629VDE TBI



Profili




Standard

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Attributi del prodotto

- lama: acciaio al cromo vanadio hard premium, interamente bonificato e temprato
- impugnatura: di forma ergonomica
- materiale tricomponente
- foro per appendere
- conforme allo standard DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018
- prodotto in base alle normative DIN 3125



616464



5.5



125



225




80



					
616465	6	125	225	82	
616466	7	125	235	112	
616467	8	125	235	116	
623341	9	125	235	124	Till end of stock
616468	10	125	235	122	
623342	11	125	235	159	Till end of stock
616469	13	125	245	179	
623445	14	125	245	166	Till end of stock

* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

Utilizzo (pictures)

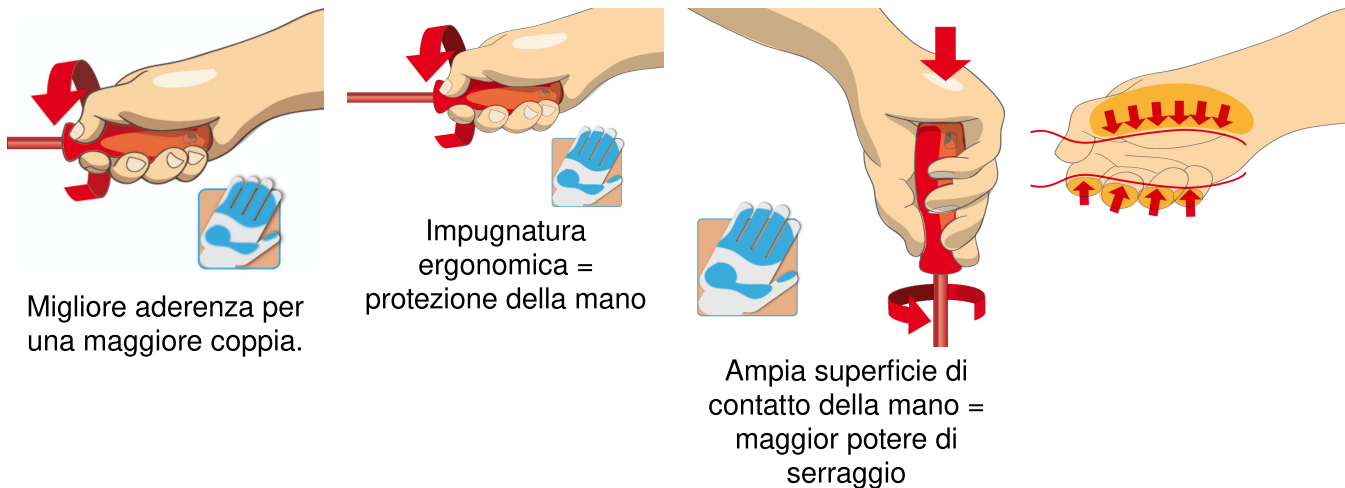

Safety tips



- VDE tools that have several parts, have to be assembled correctly before use.
- When working with VDE tools avoid contact with water.



- Don't use tools that shows sign of wear and have the second layer of plastic visible.

Frequently asked questions

Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.