

Ključ nasadni sa VDE TBI ručkom, izolovan

629VDEETBI



Profili




Standardi

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Opis proizvoda

- stablo: premium hard hrom-vanadijum čelik, u potpunosti kaljeno i ojačano
- ručka ergonomski oblikovana
- ručica od trokomponentnog materijala
- otvor u dršci za kačenje
- izrađen prema standardu DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018
- izrađen prema standardu DIN 3125



616464



5.5

C

125

L

225




80



					
616465	6	125	225	82	
616466	7	125	235	112	
616467	8	125	235	116	
623341	9	125	235	124	Till end of stock
616468	10	125	235	122	
623342	11	125	235	159	Till end of stock
616469	13	125	245	179	
623445	14	125	245	166	Till end of stock

* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

Upotreba (slike)

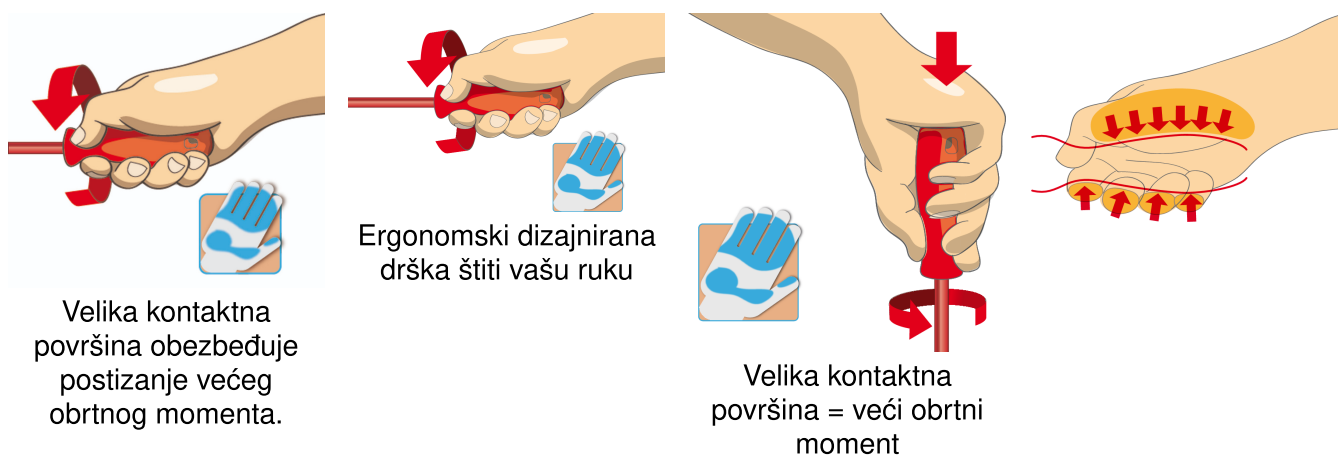

Pravilna upotreba



- VDE tools that have several parts, have to be assembled correctly before use.
- When working with VDE tools avoid contact with water.



- Don't use tools that shows sign of wear and have the second layer of plastic visible.

Najčešće postavljana pitanja

Da li se izolovani VDE alati smatraju ličnom zaštitnom opremom PPE?

Prema propisima EU, VDE alati se ne smatraju zaštitnom opremom PPE.

Da li se VDE alati testiraju samo na osnovu uzoraka u serijskoj proizvodnji?

Test visokog napona (pri 10 kV) se u potpunosti izvodi na svakom alatu. Ostala ispitivanja se vrše u skladu sa standardom EN60900.