

# Ključ nasadni 1/4", dvanaesterokutni

188/2 12p



## Profili

---



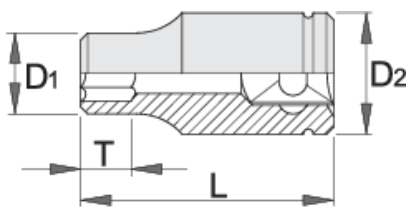
## Standardi




---

ISO 2725-1

## Atributi proizvoda

- materijal: krom-vanadij
- kovan, u cijelosti ojačan i zakaljen
- kromirani (ISO 1456:2009)
- izrađeni prema standardu ISO2725-1 (samo metričke dimenzije)



|  |  | L  | D1   | D2   | T  |  |
|--|---|----|------|------|----|---|
| 616857   | 4   | 25 | 6.8  | 11.9 | 5  | 15  |
| 616858   | 4.5   | 25 | 7.1  | 11.9 | 5  | 15  |
| 616859   | 5   | 25 | 8    | 11.9 | 5  | 15  |
| 616860   | 5.5   | 25 | 8.3  | 11.9 | 5  | 15  |
| 616861   | 6   | 25 | 9.3  | 11.9 | 5  | 15  |
| 616862   | 7   | 25 | 10.5 | 11.9 | 5  | 15  |
| 616863   | 8   | 25 | 10.5 | 11.9 | 5  | 15  |
| 616864   | 9   | 25 | 10.5 | 13.1 | 8  | 15  |
| 616865   | 10  | 25 | 10.5 | 14.5 | 8  | 39  |
| 616866   | 11  | 25 | 10.5 | 15.8 | 8  | 39  |
| 616867   | 12  | 25 | 10.5 | 16.8 | 8  | 39  |
| 616868   | 13  | 25 | 10.5 | 17.8 | 10 | 39  |
| 616869   | 14  | 25 | 10.5 | 19.6 | 10 | 39  |
| 616870   | 3/16"   | 25 | 8    | 11.9 | 5  | 15  |
| 616871   | 7/32"   | 25 | 8.3  | 11.9 | 5  | 15  |
| 616872   | 1/4"  | 25 | 9.3  | 11.9 | 5  | 15  |
| 616873   | 9/32"   | 25 | 10.5 | 11.9 | 5  | 15  |
| 616874   | 5/16"   | 25 | 10.5 | 11.9 | 5  | 15  |
| 616875   | 11/32"  | 25 | 10.5 | 12.9 | 5  | 15  |
| 616876   | 3/8"  | 25 | 10.5 | 13.9 | 8  | 39  |
| 616877   | 13/32"  | 25 | 10.5 | 14   | 8  | 39  |
| 616878   | 7/16"   | 25 | 10.5 | 15.8 | 8  | 39  |
| 616879   | 1/2"  | 25 | 10.5 | 17.8 | 10 | 39  |
| 616880   | 9/16"   | 25 | 10.5 | 19.6 | 10 | 39  |

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

## Frequently asked questions

**I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?**

When working with pneumatic screwdrivers, you must use an impact socket wrench.