


# Socket 1/4", long type, 6 point

188/2L6p



## Profiles

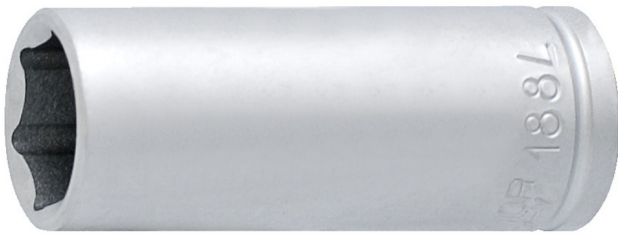


## Standards

ISO 2725 - 1

## Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- made according to standard ISO 2725-1 (only metric dimension)

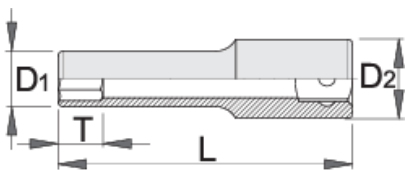

618697



3.2

L

50

D1

6

D2

12

T





8



20



Till end of stock

		L	D1	D2	T		
616881	4	50	6.8	11.9	5	20	Till end of stock
616882	4.5	50	7.1	11.9	5	20	Till end of stock
616883	5	50	8	11.9	5	20	Till end of stock
616884	5.5	50	8.3	11.9	5	20	Till end of stock
616885	6	50	9.3	11.9	8	20	
616886	7	50	10.5	11.9	8	31	
616887	8	50	11,9	11.9	8	71	
616888	9	50	13,1	13.1	11	71	
616889	10	50	14,5	14.5	11	71	
616890	11	50	15,8	15.8	11	71	
616891	12	50	16,8	16.8	13	71	
616892	13	50	17,8	17.8	13	71	
616893	14	50	19,6	19.6	16	71	

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## Frequently asked questions

**I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?**

When working with pneumatic screwdrivers, you must use an impact socket wrench.