

# Bussola 1/4", tipo lungo

188/2L6p



## Profili




## Standard

ISO 2725 - 1

## Attributi del prodotto

- materiale: acciaio al cromo vanadio flex premium
- forgiata, interamente bonificata
- finitura superficiale: cromata ISO 1456:2009
- conforme allo standard ISO 2725-1 (solo misure metriche)

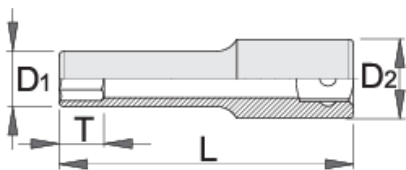

618697



3.2

L

50

D1

6

D2




12

T

8



20

		L	D1	D2	T	
616881	4	50	6.8	11.9	5	20
616882	4.5	50	7.1	11.9	5	20
616883	5	50	8	11.9	5	20
616884	5.5	50	8.3	11.9	5	20
616885	6	50	9.3	11.9	8	20
616886	7	50	10.5	11.9	8	31
616887	8	50	11,9	11.9	8	71
616888	9	50	13,1	13.1	11	71
616889	10	50	14,5	14.5	11	71
616890	11	50	15,8	15.8	11	71
616891	12	50	16,8	16.8	13	71
616892	13	50	17,8	17.8	13	71
616893	14	50	19,6	19.6	16	71

\* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

## Frequently asked questions

**I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?**

When working with pneumatic screwdrivers, you must use an impact socket wrench.