

# Socket 1/4", long type, 6 point

188/2L6p



## 프로파일




## 표준

ISO 2725 - 1

## 제품 특징

- 재질: 프리미엄 플렉스 크롬 바나듐 스틸
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- made according to standard ISO 2725-1

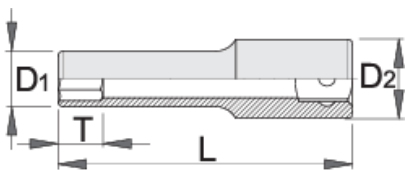

618697



3.2

L

50

D1

6

D2

12

T





8



20



Till end of stock

		L	D1	D2	T		
616881	4	50	6.8	11.9	5	20	Till end of stock
616882	4.5	50	7.1	11.9	5	20	Till end of stock
616883	5	50	8	11.9	5	20	Till end of stock
616884	5.5	50	8.3	11.9	5	20	Till end of stock
616885	6	50	9.3	11.9	8	20	
616886	7	50	10.5	11.9	8	31	
616887	8	50	11.9	11.9	8	71	
616888	9	50	13.1	13.1	11	71	
616889	10	50	14.5	14.5	11	71	
616890	11	50	15.8	15.8	11	71	
616891	12	50	16.8	16.8	13	71	
616892	13	50	17.8	17.8	13	71	
616893	14	50	19.6	19.6	16	71	

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## 자주 묻는 질문

**공업 공구에 소켓 렌치를 부착했는데 벽에 금이 갑니다. 무엇이 잘못되었을 수 있습니까?**  
 공업 드라이버로 작업할 때는 임팩트 소켓 렌치를 사용해야 합니다.