

Socket 3/8", 12 point

238/1 12p



프로파일

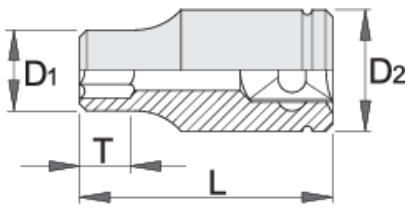





표준


ISO 2725 - 1

제품 특징

- 재질: 프리미엄 플렉스 크롬 바나듐 스틸
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- polished
- made according to standard ISO 2725-1 (only metric dimension)



		L	D1	D2	T↑	
617122	6	28	10.2	16.9	8	28
616905	7	28	10.6	16.9	8	28
616906	8	28	11.8	16.9	8	29
616907	9	28	13.2	16.9	8	29
616908	10	28	14.5	16.9	8	30
616909	11	28	15.7	16.9	8	29
616910	12	28	16.9	16.9	8	28
616911	13	28	17.9	17.9	8	32
616912	14	28	19.6	17,9	12	39
616913	15	28	20,9	20,9	12	46
616914	16	30	21.9	21.9	12	48
616915	17	30	23.5	23.5	12	49
616916	18	30	24.7	21	12	65
616917	19	30	25.9	23	14	73
616918	20	32	27.2	24	14	86
616919	21	32	27.9	25	14	88
616920	22	32	29.7	26	14	105
616921	23	32	31.7	27	14	120
616922	24	32	31.9	28	16	112
616923	1/4"	28	10.2	16.9	8	28
616924	5/16"	28	11.8	16.9	8	29
616925	3/8"	28	14.5	16.9	8	30
616926	7/16"	28	15.7	16.9	8	29
616927	1/2"	28	17,9	17,9	8	32
616928	9/16"	28	19,7	19.7	12	39
616929	5/8"	30	21,9	21.9	12	48

		L	D1	D2	T↑	
616930	11/16"	30	23,5	23.5	12	59
616931	3/4"	30	25.9	23	14	73
616932	13/16"	32	27.9	25	14	88
616933	7/8"	32	29.5	26	14	105
616934	15/16"	32	31.9	28	14	112
616935	1"	32	33.9	30	14	132

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

자주 묻는 질문

공업 공구에 소켓 렌치를 부착했는데 벽에 금이 갑니다. 무엇이 잘못되었을 수 있습니까?
 공업 드라이버로 작업할 때는 임팩트 소켓 렌치를 사용해야 합니다.