

# Insulated adjustable wrench

250/1VDP



## Profiles



## Standards

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Product features

- material: premium chrome vanadium steel
- surface finish: trivalent chrome plated according to ISO 1456:2009
- made according to standard ISO 6787 and EN IEC 60900:2018

## Advantages:


- double layered - double coloured insulation for additional safety
- controlled according to standard EN IEC 60900
- with scale

## Important!

- if second layer is visible, replace your insulated tool with a new one.

## Caution!


- Adjust the tool before using! Adjustment while working is life dangerous.

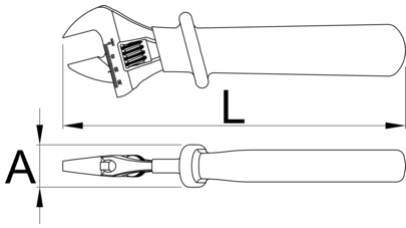


Barcode	↕	↔	L	A	mm	Person	Clock
616849	200	8"	210	31	24	355	
616850	250	10"	260	31	27	579	
616851	300	12"	310	32	34	871	

\* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.


### Usage (pictures)




The adjustable jaw



The wrench sustains both directions of rotation



Toothed adjustable screw



Measuring scale

### Spare parts



Spare parts for adjustable wrench 250/1, 250/1A

### Safety tips



- Discard any wrench with a spread or damaged fixed jaw or a bent handle