

# Ključ podešavajući, izolirani

250/1VDP



## Profili



## Standardi

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Atributi proizvoda

- materijal: Premium krom-molibden
- kromirani (ISO 1456:2009)
- izrađeni prema standardu DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Prednosti:


- obloženi dvostrukim izolacijskim slojem sa dvije boje, koje omogućuju dodatnu sigurnost
- kontrolirano prema standardu EN IEC 60900
- sa mjernom skalom

## Važno!

- ukoliko drugi sloj postane vidljiv, alat zamijenite novim.

## Oprez!


- Namjestite alat prije upotrebe! Podešavanje tokom rada je opasno za život.

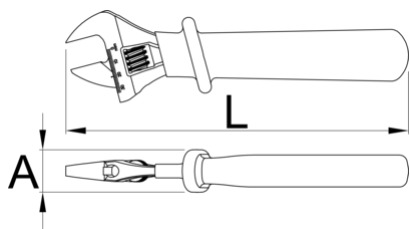


			L	A		
621917	150	6"	165	25	19	182
616849	200	8"	210	31	24	355
616850	250	10"	260	31	27	579
616851	300	12"	310	32	34	871
622065	380	16"	390	37	41	1505

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.


## Upotreba (pictures)




Podesiv otvor čeljusti ključa



Ključ omogućuje rotaciju u oba smjera - i odvijanje i pritezanje



nazubljen podešavajući vijak



mjerna skala

## Rezervni dijelovi



Rezervni dijelovi za art. 250 i 250 A

## Safety tips



- Discard any wrench with a spread or damaged fixed jaw or a bent handle