

高颈管扳手

217/2



配置文件




产品属性

- 材料：铬钼钢
- 完全淬火与回火
- 表面处理：根据ISO 1456:2009标准镀铬

用途：

- 在工业或维修点内无法触及的区域进行作业通过带有长螺纹的洞孔对紧固件进行紧固。

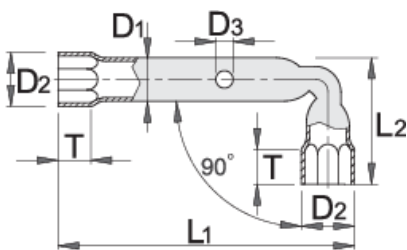

617053



5.5

L1

98

L2

25

D1

7

D2

8,5

D3

4.3





T

7



18



		L1	L2	D1	D2	D3	T		
617054	6	103	26	9	10	5,3	8	35	Till end of stock
617055	7	106	26	9	10	5.3	8	36	
617056	8	112	34	11	12,5	6.3	9	48	
617057	9	110	34	11	13,5	6.3	9	54	Till end of stock
617058	10	121	41	13	15.5	6.3	10	82	
617059	11	120	40	13	16,7	6.3	10	81	Till end of stock
617060	12	135	46	16	18,2	8.5	12	123	
617061	13	133	46	16	19,5	8.5	12	126	
617063	15	135	51	18	22,3	8.5	14	163	Till end of stock
617065	17	140	56	20	24,6	10.5	15	197	
617066	18	149	65	22	25,8	12.5	16	234	Till end of stock
617067	19	150	64	22	27	12.5	16	237	
617070	22	159	71	25	31,4	12.5	20	353	

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

配件

———— 216/1手柄