

Jeu de 6 tournevis isolés VDE 1000V TBI Torx



Profils



Description produit

621CS6VDETBI

Le jeu comprend :


• 6x screwdriver with insulated blade VDE TBI with TX profile (article 621VDETBI) dim. TX10, TX15, TX20, TX25, TX27, TX30


Nom du produit	SKU	Article	Dimentions	Quantité
Jeu de 6 tournevis isolés VDE 1000V TBI Torx	617049	621CS6VDETBI	TX 10 - TX 30	6

Nom du produit	SKU	Article	Dimentions	Quantité
Tournevis isolé VDE 1000V TBI pour vis à empreinte TORX		621VDETBI	TX 10, TX 15, TX 20, TX 25, TX 27, TX 30	6

* Les images des produits ne sont pas contractuelles. Toutes les dimensions sont en mm, les poids en grammes.

Utilisation (pictures)

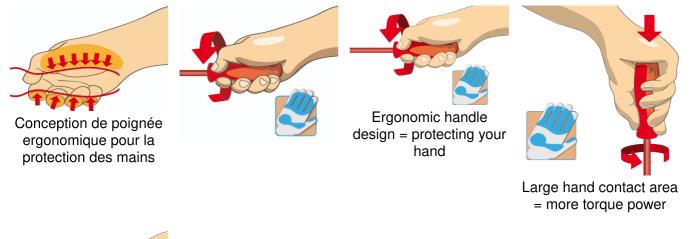



Safety tips

\checkmark

• Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.

• Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.

• A rounded tip should be redressed with a file; make sure edges are straight.

• Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.

• Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.

• A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade might break and send a particle of steel into the operator's arm or even towards his eyes.

\bigotimes

• Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.

• Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.

• Don't use a screwdriver with a split or broken handle.

• Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.

• Don't use tools that shows sign of wear and have the second layer of plastic visible.

• VDE tools that have several parts, have to be assembled correctly before use.

• When working with VDE tools avoid contact with water.