

Набор отвёрток с профилем жала TORX изолированных, рукоятки TBI, в картонной упаковке

621CS6VDETBI



Профили




Описание товара

В комплекте:


- 6х отвёрток с профилем жала TORX изолированных, рукоятка TBI (арт. 621VDETBI) TX10, TX15, TX20, TX25, TX27, TX30

Наименование товара	SKU	Артикул	Размеры	Количество
Набор отвёрток с профилем жала TORX изолированных, рукоятки TBI, в картонной упаковке	617049	621CS6VDETBI	TX 10 - TX 30	6

Наименование товара	SKU	Артикул	Размеры	Количество
Отвёртка с профилем жала TORX изолированная, рукоятка ТВИ		621VDEТВИ	ТХ 10, ТХ 15, ТХ 20, ТХ 25, ТХ 27, ТХ 30	6

* Изображения продуктов носят демонстрационный характер. Все размеры указаны в миллиметрах, вес в граммах.

Использование (картинки)

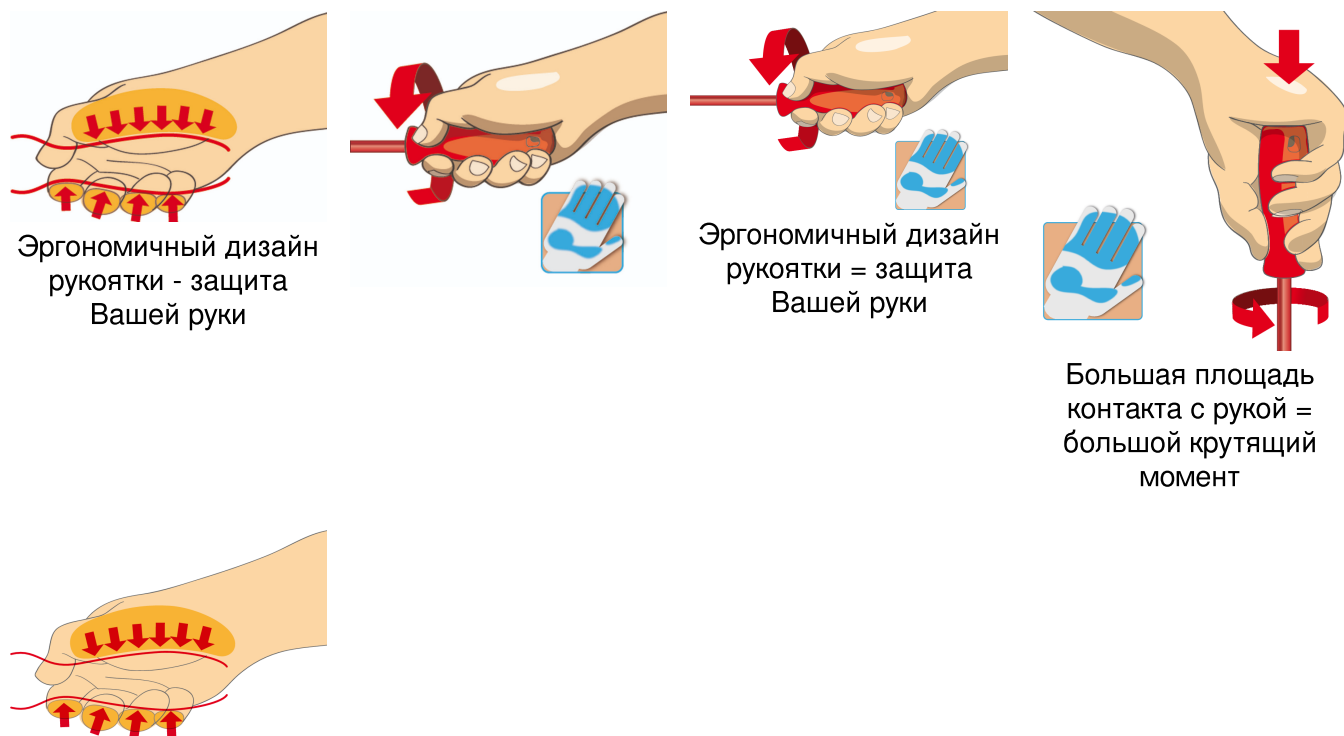

Эргономичный дизайн рукоятки - защита Вашей руки

Эргономичный дизайн рукоятки = защита Вашей руки

Большая площадь контакта с рукой = большой крутящий момент

Советы по безопасности



- Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.
- Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.
- A rounded tip should be redressed with a file; make sure edges are straight.
- Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.
- Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.
- A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade



- Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.
- Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.
- Don't use a screwdriver with a split or broken handle.
- Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.
- Don't use tools that shows sign of wear and have the second layer of plastic visible.

might break and send a particle of steel into the operator's arm or even towards his eyes.

- VDE tools that have several parts, have to be assembled correctly before use.
- When working with VDE tools avoid contact with water.