

Ключ раздвижен

250/1



Профили




Стандарти

ISO 6787

Параметри на продукта

- материал: хром-ванадий
- ковани, изцяло закалени
- хромиран в съответствие със стандарт EN 12540
- полирана глава
- със скала
- изработен в съответствие със стандарт ISO 6787

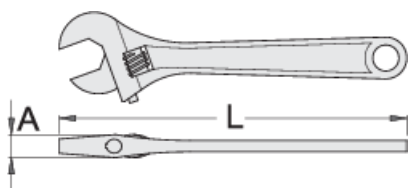

611917



100



4"

L

108.4

A






10.5



13




61

			L	A		
611918	150	6"	157.4	13	19	133
601016	200	8"	205.9	15	24	243
601017	250	10"	255.5	17	27	439
601018	300	12"	306.1	20	34	702
601019	380	16"	383	26	41	1315
605113	450	18"	460.5	32	48	1730
615148	600	24"	612.3	36	57	3240

* Снимките на продуктите са символични. Всички размери са в мм., теглото е в грамове .

Употреба (снимки)

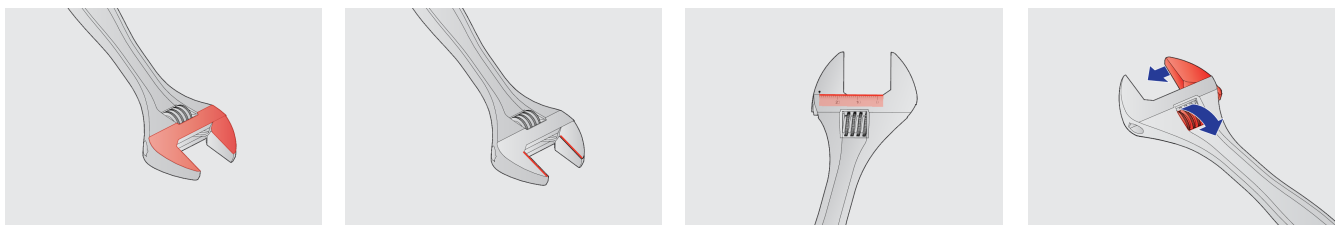

Резервни части



Резервни части за арт.250/1, 250/1A

Съвети за безопасност



- Изхвърлете всеки ключ, чиито челюсти са повредени или не са паралелни, както и ако дръжката е изкривена.



Безопасност (снимки)

