

Ключ шестограм (inbus)

220/3



Профили




Стандарти

ISO 2936

Параметри на продукта

- материал: хром-ванадий
- закален
- никелиран
- изработен в съответствие със стандарт ISO 2936 (само за метрични размери)

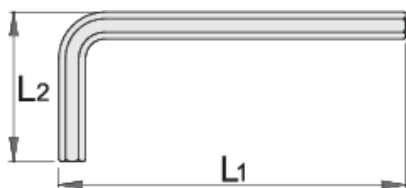

607823



1.5

L1




46.5

L2

15.5



2.8

|  |  | L1 | L2 |  |
|--|---|------|------|---|
| 607824 | 2 | 52 | 18 | 1.72 |
| 607825 | 2.5 | 58.5 | 20.5 | 3 |
| 601036 | 3 | 66 | 23 | 5 |
| 601037 | 4 | 74 | 29 | 9.85 |
| 601038 | 5 | 85 | 33 | 18 |
| 601040 | 6 | 96 | 38 | 35 |
| 601041 | 7 | 102 | 41 | 47 |
| 601042 | 8 | 108 | 44 | 65 |
| 601044 | 10 | 122 | 50 | 108 |
| 601045 | 12 | 137 | 57 | 163 |
| 601046 | 14 | 154 | 70 | 258 |
| 601047 | 17 | 177 | 80 | 433 |
| 601048 | 19 | 199 | 89 | 603 |
| 616967 | 3/64" | 41 | 13 | 5 |
| 616966 | 1/20" | 41 | 13 | 5 |
| 611905 | 1/16" | 47 | 16 | 5 |

* Снимките на продуктите са символични. Всички размери са в мм., теглото е в грамове .

Безопасност (снимки)

