

Inbussleutel, lang type

220/3L



Profielen

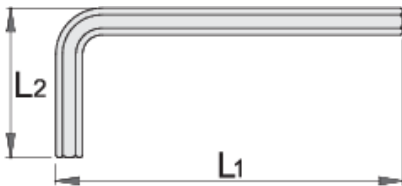





Standaard

ISO 2936 L

Product attributen

- materiaal: hoogwaardig chroom-vanadium-staal
- volledig gehard en getemperd
- oppervlakte afwerking: vernikkeld
- Ontworpen volgens de ISO 2936 normen (metrische afmetingen)



		L1	L2	
608510	1.5	91.5	15.5	1
608511	2	102	18	7
608512	2.5	114.5	20.5	10



L1

L2



608513	3	129	23	14
608514	4	144	29	22
608515	5	165	33	35
608516	6	186	38	55
608517	7	197	41	78
608518	8	208	44	105
608519	10	234	50	105
608520	12	262	57	280
608521	14	294	70	437
608522	17	337	80	753
608523	19	379	89	1026
616975	1/16"	92	16	6
616976	5/64"	102	18	7
616977	3/32"	114	20	10
616978	1/8"	129	23	14
616979	9/64"	140	26	22
616980	5/32"	144	29	22
616981	3/16"	165	33	35
616982	7/32"	176	36	55
616983	1/4"	186	38	55
616984	5/16"	208	44	105
616985	3/8"	234	50	105
616986	7/16"	261	53	105
616987	1/2"	293	63	105
616988	9/16"	294	69	437
616989	5/8"	336	76	753
616990	3/4"	379	89	1026

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm, en het gewicht in grammen. Alle vermelde afmetingen kunnen variëren in tolerantie.

Veiligheid (Afbeeldingen)

