

Ключ шестограм (inbus), удължен

220/3L



Профили








Стандарти



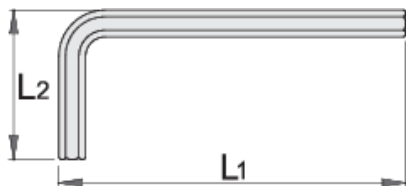

ISO 2936 L

Параметри на продукта

- материал: хром-ванадий
- закален
- никелиран
- изработен в съответствие със стандарт ISO 2936 (само за метрични размери)



		L1	L2		
608510	1.5	91.5	15.5	1	
608511	2	102	18	7	
608512	2.5	114.5	20.5	10	

			L1	L2		
608513		3	129	23	14	
608514		4	144	29	22	
608515		5	165	33	35	
608516		6	186	38	55	
608517		7	197	41	78	Till end of stock
608518		8	208	44	105	
608519		10	234	50	105	
608520		12	262	57	280	
608521		14	294	70	437	
608522		17	337	80	753	
608523		19	379	89	1026	
616975		1/16"	92	16	6	
616976		5/64"	102	18	7	
616977		3/32"	114	20	10	
616978		1/8"	129	23	14	
616979		9/64"	140	26	22	
616980		5/32"	144	29	22	
616981		3/16"	165	33	35	
616982		7/32"	176	36	55	
616983		1/4"	186	38	55	
616984		5/16"	208	44	105	
616985		3/8"	234	50	105	
616986		7/16"	261	53	105	
616987		1/2"	293	63	105	
616988		9/16"	294	69	437	
616989		5/8"	336	76	753	
616990		3/4"	379	89	1026	

* Снимките на продуктите са символични. Всички размери са в мм., теглото е в грамове .

Безопасность (снимки)

