

高颈开口梅花扳手

183/2



配置文件

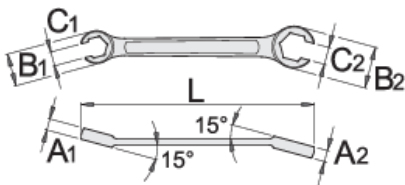


产品属性




- 材料:优质铬钒钢
- 落锻, 完全淬火与回火
- 表面处理: 根据ISO 1456:2009标准镀铬
- 尺寸为12x14的梅花端头有6个齿点, 17x19至30x32有12个齿点

用途:

- 在工厂和维修店, 专用于液压和气动安装
- 此扳手用于标准梅花扳手无法操作的连接处进行作业(例如, 钢丝、液压和水管上的连接处, 以及阀门上的连接处等)。



Barcode	mm	L	A1	A2	B1	B2	C1	C2	Icon
612701	8 x 10	145	7	8.5	18	20	6	7	48
612702	10 x 11	152	8.5	9	20	22	7	8.5	64

		L	A1	A2	B1	B2	C1	C2	
612703	11 x 13	165	9	11	22	26	8.5	10	88
612704	12 x 14	178	10	12	24	28	9	11	125
615147	16 x 18	196	12	12.5	30.5	33.5	13	14	203
612705	17 x 19	210	13	14	32	35	14	15	204
612706	19 x 22	233	14	16	35	41	15	17	242
612707	22 x 24	265	16	17	41	45	17	18	297
612708	24 x 27	265	17	17	45	48	18	20	367
612709	30 x 32	285	21	23	50	52	22	24	552

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

用途 (pictures)

