

Ključ okasti otvoreni

183/2



Profili

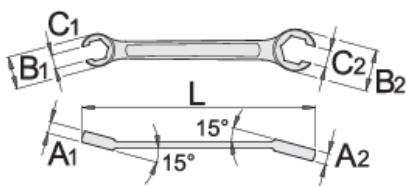





Opis proizvoda




- materijal: premium hrom-vanadijum čelik
- kovan, u potpunosti kaljen i ojačan
- površinska zaštita: hromiran (ISO 1456:2009)
- šestougaoni obuhvatni deo do dim. 12x14, dvanaestougaoni od dim. 16x18 do 30x32

Upotreba:

- u industriji i servisnim radionicama koje intenzivno koriste hidraulične i pneumatske instalacije
- ovaj ključ se upotrebljava na spojevima gde je upotreba standardnog okastog ključa nemoguća zbog prirode posla (npr. spojevi čeličnih sajli, hidraulične i cevi za vodovod i ventili...)



		L	A1	A2	B1	B2	C1	C2	
612701	8 x 10	145	7	8.5	18	20	6	7	48
612702	10 x 11	152	8.5	9	20	22	7	8.5	64

		L	A1	A2	B1	B2	C1	C2	
612703	11 x 13	165	9	11	22	26	8.5	10	88
612704	12 x 14	178	10	12	24	28	9	11	125
615147	16 x 18	196	12	12.5	30.5	33.5	13	14	203
612705	17 x 19	210	13	14	32	35	14	15	204
612706	19 x 22	233	14	16	35	41	15	17	242
612707	22 x 24	265	16	17	41	45	17	18	297
612708	24 x 27	265	17	17	45	48	18	20	367
612709	30 x 32	285	21	23	50	52	22	24	552

* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

Upotreba (slike)

