

# Chiave a settore

255/2

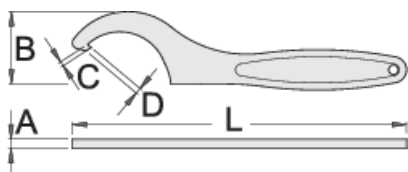



## Profili






## Attributi del prodotto

- materiale: acciaio al cromo vanadio premium
- interamente bonificata
- finitura superficiale: cromata ISO 1456:2009
- conforme allo standard DIN 1810



		L	C	D	A	B	
613050	12 - 14	109	1.2	1.5	3	12	27
613051	16 - 20	109	1.5	2	3	12	28
613052	25 - 28	136	2	2.5	4	21	56
613053	30 - 32	136	2	2.5	4	21	55
613054	34 - 36	171	2.5	3	5	28.5	114
613055	40 - 42	171	2.5	3	5	28.5	111

		L	C	D	A	B	
613056	45 - 50	207	3	3.5	6	37	206
613057	52 - 55	207	3	3.5	6	37	209
613058	58 - 62	242	3.5	4	7	46	320
613059	68 - 75	242	3.5	4	7	46	303
613060	80 - 90	281	4	5	8	61	472
613061	95 - 100	281	4	5	8	61	436
613062	110 - 115	334	4	5	10	81	805
613063	120 - 130	334	4	5	10	81	829

\* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

## Safety tips



- The correct force is only achieved when the hook wrench is used correctly.



- Don't hammer on a wrench handle.
- Don't use an extension on the handle.

## Safety (pictures)

