

# Flexible hook wrench

255/2F

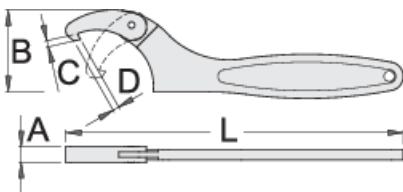





## Profiles



## Product features

- material: premium chrome vanadium steel
- entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009



		L	C	D	A	B	
615027	15 - 35	140	2,5	2,5	7	25	83
615028	35 - 50	201	4	4	10	41.5	196
615029	50 - 80	262	5	5	12	68	455
615030	80 - 120	320	5.5	5.5	14	86	829
615031	120 - 180	418	7.5	9	16	134	1768

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## Usage (pictures)



## Safety tips



- The correct force is only achieved when the hook wrench is used correctly.



- Don't hammer on a wrench handle.
- Don't use an extension on the handle.

## Safety (pictures)

