

소켓 1/4", 6 포인트

188/2 6p



프로파일

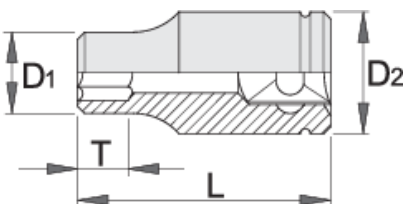






표준

ISO 2725 - 1

제품 특징

- 재질: 프리미엄 플렉스 크롬 바나듐 스틸
- 낙하 단조, 완전 경화 및 담금질
- 표면 마감: ISO 1456:2009에 따른 크롬 도금
- ISO 2725-1표준에 따라 제작(미터법만)



		L	D1	D2	T		
600815	4	25	6.8	11,9	5	15	
600816	4.5	25	7.1	11,9	5	15	
600817	5	25	8	11,9	5	15	
600818	5.5	25	8.3	11,9	5	15	
600819	6	25	9.3	11,9	5	15	
600820	7	25	10,5	11,9	5	15	
600821	8	25	11,9	11,9	5	15	
600822	9	25	12,9	12,9	8	15	
600823	10	25	13,9	13,9	8	39	
600824	11	25	15,9	15,9	8	39	
603130	12	25	16,9	16,9	8	39	
600825	13	25	17,9	17,9	10	39	
603131	14	25	19.7	19.7	10	39	

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

자주 묻는 질문

**공압 공구에 소켓 렌치를 부착했는데 벽에 금이 갔습니다. 무엇이 잘못되었을 수 있습니까?
공압 드라이버로 작업할 때는 임팩트 소켓 렌치를 사용해야 합니다.**