

Lokma 1/4"

188/2 6p



Profiles

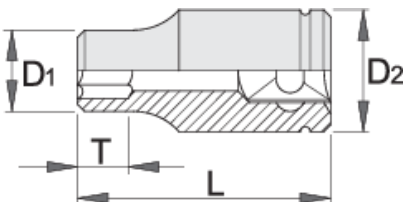






Standards

ISO 2725-1

Product features

- malzeme: krom vanadyum
- sıcak dövme, tamamen sertleştirilmiş ve temperlenmiş
- yüzey bitirme: ISO 1456:2009 standardına göre krom kaplamalı
- ISO 2725-1 standardına göre yapılmıştır (yalnızca metrik boyut)



		L	D1	D2	T		
618682	3.2	25	6	12	4	15	Till end of stock
600815	4	25	6.8	11,9	5	15	
600816	4.5	25	7.1	11,9	5	15	
600817	5	25	8	11,9	5	15	
600818	5.5	25	8.3	11,9	5	15	
600819	6	25	9.3	11,9	5	15	
600820	7	25	10,5	11,9	5	15	
600821	8	25	11,9	11,9	5	15	
600822	9	25	12,9	12,9	8	15	
600823	10	25	13,9	13,9	8	39	
600824	11	25	15,9	15,9	8	39	
603130	12	25	16,9	16,9	8	39	
600825	13	25	17,9	17,9	10	39	
603131	14	25	19.7	19.7	10	39	
618683	3/16"	25	8	11.9	5	15	Till end of stock
618684	7/32"	25	8.8	11.9	5	15	Till end of stock
618685	1/4"	25	9.3	11.9	5	15	Till end of stock
618686	9/32"	25	10.5	11.9	5	15	Till end of stock
618687	5/16"	25	11,9	11,9	5	15	Till end of stock
618688	11/32"	25	12,9	12,9	5	15	Till end of stock
618689	3/8"	25	13,9	13,9	8	39	Till end of stock
618690	13/32"	25	14,9	14.1	8	39	Till end of stock
618691	7/16"	25	10.5	15.9	8	39	Till end of stock
618692	1/2"	25	17,9	17,9	10	39	Till end of stock
618693	9/16"	25	19,7	19,7	10	39	Till end of stock

* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

Frequently asked questions

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.