

# Socket 3/8", 6 point

238/1 6p



## Profiles

---



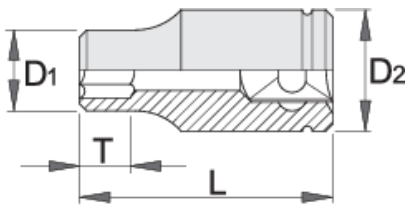
## Standards




---

ISO 2725 - 1

## Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- polished
- made according to standard ISO 2725-1 (only metric dimension)



		L	D1	D2	T↑	
605322	6	28	10,2	16,9	8	28
605323	7	28	10,6	16,9	8	28
605324	8	28	11,8	16,9	8	28
605325	9	28	13,2	16,9	8	29
605326	10	28	14,5	16,9	8	29
605327	11	28	15,7	16,9	8	30
605328	12	28	16,9	16,9	8	31
605329	13	28	17,9	17,9	8	35
605330	14	28	19,7	19,7	12	41
605331	15	28	20,9	20,9	12	44
605332	16	30	21,9	21,9	12	52
605333	17	30	23,5	23,5	12	57
605334	18	30	24,7	21	12	57
605335	19	30	25,9	23	14	59
605336	20	32	27,2	24	14	73
605337	21	32	27,9	25	14	73
605338	22	32	29,7	26	14	88

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## Frequently asked questions

**I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?**

When working with pneumatic screwdrivers, you must use an impact socket wrench.