

# Steckschlüssel 3/8 Zoll

238/1 6p



## Profile

---



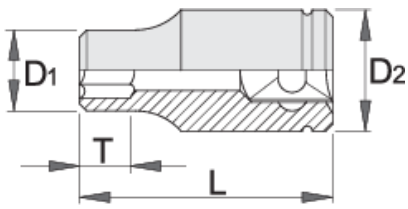
## Standards




---

ISO 2725-1

## Produkteigenschaften

- Material: Premium Flex Chrom-Vanadium-Stahl
- gesenkgeschmiedet, vollkommen gehärtet und vergütet
- verchromt gemäß EN12540
- poliert
- gefertigt gemäß ISO 2725-1 (nur metrische Dimension)



|  |  | L  | D1   | D2   | T ↑ |  |
|--|---|----|------|------|-----|---|
| 605322   | 6   | 28 | 10,2 | 16,9 | 8   | 28  |
| 605323   | 7   | 28 | 10,6 | 16,9 | 8   | 28  |
| 605324   | 8   | 28 | 11,8 | 16,9 | 8   | 28  |
| 605325   | 9   | 28 | 13,2 | 16,9 | 8   | 29  |
| 605326   | 10  | 28 | 14,5 | 16,9 | 8   | 29  |
| 605327   | 11  | 28 | 15,7 | 16,9 | 8   | 30  |
| 605328   | 12  | 28 | 16,9 | 16,9 | 8   | 31  |
| 605329   | 13  | 28 | 17,9 | 17,9 | 8   | 35  |
| 605330   | 14  | 28 | 19,7 | 19,7 | 12  | 41  |
| 605331   | 15  | 28 | 20,9 | 20,9 | 12  | 44  |
| 605332   | 16  | 30 | 21,9 | 21,9 | 12  | 52  |
| 605333   | 17  | 30 | 23,5 | 23,5 | 12  | 57  |
| 605334   | 18  | 30 | 24,7 | 21   | 12  | 57  |
| 605335   | 19  | 30 | 25,9 | 23   | 14  | 59  |
| 605336   | 20  | 32 | 27,2 | 24   | 14  | 73  |
| 605337   | 21  | 32 | 27,9 | 25   | 14  | 73  |
| 605338   | 22  | 32 | 29,7 | 26   | 14  | 88  |

\* Bilder von Produkten sind Symbolfotos. Abmessungen sind in mm, Gewichte in Gramm.

## Häufig gestellte Fragen

**I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?**

When working with pneumatic screwdrivers, you must use an impact socket wrench.