

Socket 3/8", 6 point

238/1 6p



프로파일




표준

ISO 2725 - 1

제품 특징

- 재질: 프리미엄 플렉스 크롬 바나듐 스틸
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- polished
- made according to standard ISO 2725-1 (only metric dimension)

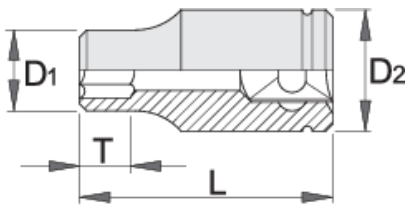

Barcode	mm	L	D1	D2	T↑	Weight
605322	6	28	10.2	16.9	8	28
605323	7	28	10.6	16.9	8	28
605324	8	28	11.8	16.9	8	28
605325	9	28	13.2	16.9	8	29
605326	10	28	14.5	16.9	8	29
605327	11	28	15.7	16.9	8	30
605328	12	28	16.9	16.9	8	31
605329	13	28	17.9	17.9	8	35
605330	14	28	19.7	19.7	12	41
605331	15	28	20.9	20.9	12	44
605332	16	30	21.9	21.9	12	52
605333	17	30	23.5	23.5	12	57
605334	18	30	24.7	21	12	57
605335	19	30	25.9	23	14	59
605336	20	32	27.2	24	14	73
605337	21	32	27.9	25	14	73
605338	22	32	29.7	26	14	88

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

자주 묻는 질문

공압 공구에 소켓 렌치를 부착했는데 벽에 금이 갑니다. 무엇이 잘못되었을 수 있습니까?
공압 드라이버로 작업할 때는 임팩트 소켓 렌치를 사용해야 합니다.