

Dopsleutel 3/8", lang

238/1L6p



Profielen




Standaard

ISO 2725 - 1

Product attributen

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- polished
- made according to standard ISO 2725-1 (only metric dimension)

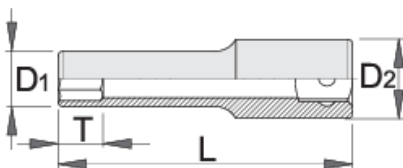

612036



8

L

63

D1

11.8

D2

16.8

T↑





9



55



Till end of stock

		L	D1	D2	T↑		
612037	9	63	13.2	16.8	9	58	Till end of stock
612038	10	63	14.5	16.8	9	61	Till end of stock
612039	11	63	15.7	16.8	12	67	Till end of stock
612040	12	63	16.8	16	12	75	Till end of stock
612041	13	63	17.8	16.5	12	81	Till end of stock
612042	14	63	19.55	17	15	91	Till end of stock
612043	15	63	20.75	18	15	117	Till end of stock
612044	16	63	21.75	19	15	107	Till end of stock
612045	17	63	23.3	20	15	128	Till end of stock
612046	18	63	24.5	21	18	112	Till end of stock
612047	19	63	25.7	23	18	147	Till end of stock
612048	20	63	27	24	18	157	Till end of stock
612049	21	63	27.7	25	18	165	Till end of stock
612050	22	63	29.5	26	21	200	Till end of stock

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm, en het gewicht in grammen. Alle vermelde afmetingen kunnen variëren in tolerantie.

Veelgestelde vragen

Ik heb de dopsleutel aan het pneumatische gereedschap bevestigd en de wand barstte. Wat kan er mis zijn?

Wanneer u met pneumatische schroevendraaiers werkt, moet u een dopsleutel met slagvastheid (zwarte kleur) gebruiken.