

# 3/8" 套筒，加长

238/1L6p



## 配置文件




## 标准

ISO 2725 - 1

## 产品属性

- 材料:优质铬钒钢
- 落锻，完全淬火与回火
- 表面处理：根据ISO 1456:2009标准镀铬
- 抛光
- 根据ISO2725-1标准生产（只限公制规格）

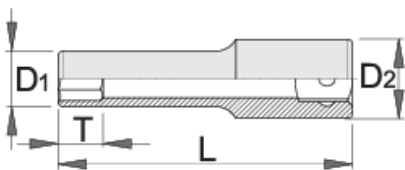

612036



8

L

63

D1

11.8

D2

16.8

T↑





9



55



Till end of stock

		L	D1	D2	T↑		
612037	9	63	13.2	16.8	9	58	Till end of stock
612038	10	63	14.5	16.8	9	61	Till end of stock
612039	11	63	15.7	16.8	12	67	Till end of stock
612040	12	63	16.8	16	12	75	Till end of stock
612041	13	63	17.8	16.5	12	81	Till end of stock
612042	14	63	19.55	17	15	91	Till end of stock
612043	15	63	20.75	18	15	117	Till end of stock
612044	16	63	21.75	19	15	107	Till end of stock
612045	17	63	23.3	20	15	128	Till end of stock
612046	18	63	24.5	21	18	112	Till end of stock
612047	19	63	25.7	23	18	147	Till end of stock
612048	20	63	27	24	18	157	Till end of stock
612049	21	63	27.7	25	18	165	Till end of stock
612050	22	63	29.5	26	21	200	Till end of stock

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## Frequently asked questions

**I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?**

When working with pneumatic screwdrivers, you must use an impact socket wrench.