

Bussola 3/8", tipo lungo

238/1L6p



Profili




Standard

ISO 2725 - 1

Attributi del prodotto

- materiale: acciaio al cromo vanadio flex premium
- forgiata, interamente bonificata
- finitura superficiale: cromata ISO 1456:2009
- lucidata
- conforme allo standard ISO 2725-1 (solo misure metriche)

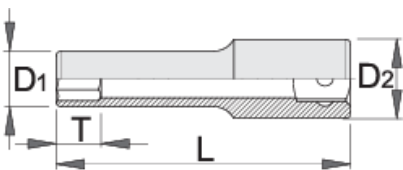

612036



8

L

63

D1

11.8

D2

16.8

T↑





9



55



Till end of stock

		L	D1	D2	T↑		
612037	9	63	13.2	16.8	9	58	Till end of stock
612038	10	63	14.5	16.8	9	61	Till end of stock
612039	11	63	15.7	16.8	12	67	Till end of stock
612040	12	63	16.8	16	12	75	Till end of stock
612041	13	63	17.8	16.5	12	81	Till end of stock
612042	14	63	19.55	17	15	91	Till end of stock
612043	15	63	20.75	18	15	117	Till end of stock
612044	16	63	21.75	19	15	107	Till end of stock
612045	17	63	23.3	20	15	128	Till end of stock
612046	18	63	24.5	21	18	112	Till end of stock
612047	19	63	25.7	23	18	147	Till end of stock
612048	20	63	27	24	18	157	Till end of stock
612049	21	63	27.7	25	18	165	Till end of stock
612050	22	63	29.5	26	21	200	Till end of stock

* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

Frequently asked questions

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.