

# Hlavica nástrčná 3/8", dlhá

238/1L6p



## Profiles




## Standards

ISO 2725 - 1

## Product features

- materiál: premium flex chróm vanádiová oceľ
- kované, tvrdené a temperované,
- chrómované v súlade s ISO 1456:2009
- leštené
- podľa ISO 2725-1

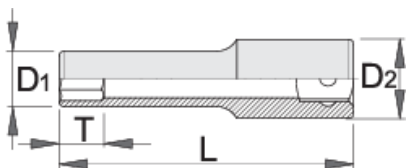

612036



8

L

63

D1

11.8

D2




16.8

T↑

9



55

		L	D1	D2	T↑	
612037	9	63	13.2	16.8	9	58
612038	10	63	14.5	16.8	9	61
612039	11	63	15.7	16.8	12	67
612040	12	63	16.8	16	12	75
612041	13	63	17.8	16.5	12	81
612042	14	63	19.55	17	15	91
612043	15	63	20.75	18	15	117
612044	16	63	21.75	19	15	107
612045	17	63	23.3	20	15	128
612046	18	63	24.5	21	18	112
612047	19	63	25.7	23	18	147
612048	20	63	27	24	18	157
612049	21	63	27.7	25	18	165
612050	22	63	29.5	26	21	200

\* Obrázky sú symbolické. Všetky rozmery sú v mm, hmotnosť je v g. Všetky udané rozmery sa môžu líšiť v rámci tolerancie.

## Frequently asked questions

**Nasadil som nástrčkový kľúč na pneumatické náradie a stena praskla. Čo môže byť zlé?**  
 Pri práci s pneumatickými skrutkovačmi musíte použiť rázový (impaktný) nástrčný kľúč.