

Kliješta za rezanje žice, kosa, robusna

466/4G



Profili

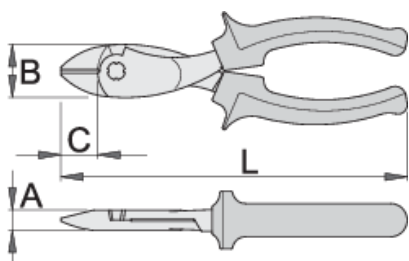




Standardi

DIN ISO 5749


Atributi proizvoda

- materijal: Premium alatni čelik
- kovana, potpuno poboljšana i ojačana
- rezni rubovi induktivno kaljeni
- završna obrada čeljusti: fino brušenje
- završna obrada: fosfatiranje po standardu DIN12476
- robusne plastične navlake za ručke
- izrađeno po standardu ISO5749



	L	B	A	C	
617687	160	23.5	10	20.5	214
608700	180	28	11	20	313
609190	200	27	11	21	344

sposobnost rezanja (10K=1kg)

	L	max 2150 N/mm ² Ø↑	max 650 N/mm ² Ø↑
617687	160	1,6	2,5
608700	180	1,8	3,0
609190	200	2,0	3,5

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Photo (pictures)

