

重型斜嘴钳

466/4G



配置文件

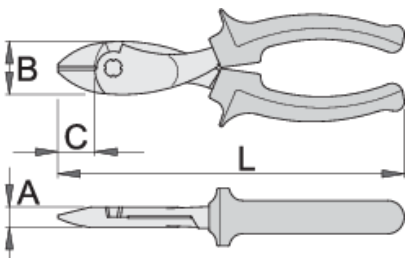




标准

DIN ISO 5749

产品属性

- 材料：特种工具钢
- 落锻，完全淬火与回火
- 切削刃感应淬火
- 头表面处理：细磨
- 表面处理：根据DIN12476标准进行磷酸盐处理
- 重型塑料把手
- 根据ISO5749标准生产



|  | L | B | A | C |  |
|---|-----|------|----|------|--|
| 617687 | 160 | 23.5 | 10 | 20.5 | 214 |
| 608700 | 180 | 28 | 11 | 20 | 313 |
| 609190 | 200 | 27 | 11 | 21 | 344 |

cutting capacity (10N=1kg)

|  | L | max 2150 N/mm ² Ø↑ | max 750 N/mm ² Ø↑ |
|--|-----|-------------------------------|------------------------------|
| 617687 | 160 | 1,6 | 2,5 |
| 608700 | 180 | 1,8 | 3,0 |
| 609190 | 200 | 2,0 | 3,5 |

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Photo (pictures)

