

# Krachtzijsnijtang

466/4G



## Profielen

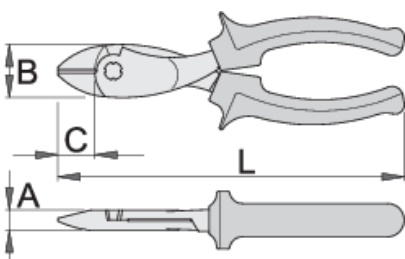




## Standaard

DIN ISO 5749


## Product attributen

- materiaal: premium plus carbonstaal
- drop forged, entirely hardened and tempered
- cutting edges induction hardened
- head surface finish: finely ground
- surface finish: phosphated to standard ISO 9717
- heavy duty plastic handles
- made according to standard ISO 5749



	L	B	A	C	
617687	160	23.5	10	20.5	214
608700	180	28	11	20	313
609190	200	27	11	21	344

knipcapaciteit (10N=1kg)

	L	max 2150 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
617687	160	1,6	2,5
608700	180	1,8	3,0
609190	200	2,0	3,5

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Foto (Afbeeldingen)

