

Krachtzijsnijtang

466/4G



Profielen

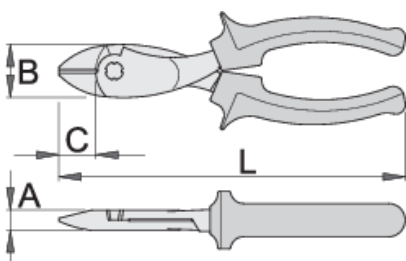




Standaard

DIN ISO 5749

Product attributen

- materiaal: premium plus carbonstaal
- drop forged, entirely hardened and tempered
- cutting edges induction hardened
- head surface finish: finely ground
- surface finish: phosphated to standard ISO 9717
- heavy duty plastic handles
- made according to standard ISO 5749



|  | L | B | A | C |  |
|---|-----|------|----|------|--|
| 617687 | 160 | 23.5 | 10 | 20.5 | 214 |
| 608700 | 180 | 28 | 11 | 20 | 313 |
| 609190 | 200 | 27 | 11 | 21 | 344 |

knipcapaciteit (10N=1kg)

|  | L | max 2150 N/mm ² Ø↑ | max 750 N/mm ² Ø↑ |
|--|-----|-------------------------------|------------------------------|
| 617687 | 160 | 1,6 | 2,5 |
| 608700 | 180 | 1,8 | 3,0 |
| 609190 | 200 | 2,0 | 3,5 |

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Foto (Afbeeldingen)

