


Nasadka 3/8" imbusowa

236/2HX




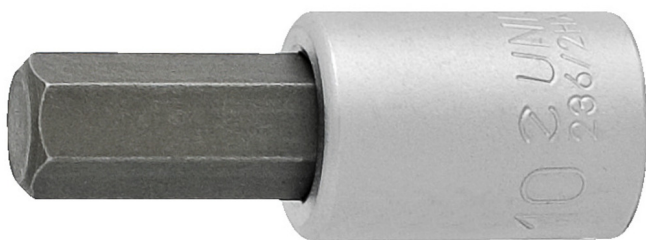


Profile



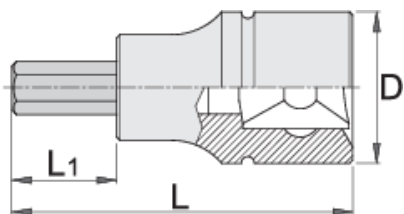


Cechy produktu

- materiał: nasadka-stal chromo- wanadowa premium flex
- materiał: bit - stal węglowa premium plus
- całkowicie utwardzana i odpuszczana
- wykonana zgodnie ze standardem DIN 7422 (tylko wymiary metryczne)



		L	L1	D	
612082	4	48	22	18	39
612083	5	48	22	18	39
612084	6	48	22	18	41

		L	L1	D	
612085	8	48	22	18	45
612086	10	48	22	18	56
617662	1/8"	48	22	18	39
617663	9/64"	48	22	18	39
617664	5/32"	48	22	18	39
617665	3/16"	48	22	18	39
617666	7/32"	48	22	18	41
617667	1/4"	48	22	18	41
617668	5/16"	48	22	18	45
617669	3/8"	48	22	18	56

* Przedstawiony wygląd produktu jest orientacyjny. Wszystkie wymiary są w mm, podana waga w gramach

Bezpieczeństwo (Obrazy)

