

Socket 1/2", 6 point

190/1 6p



Profiles








Standards



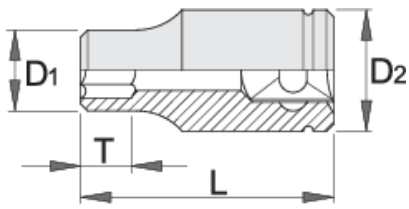

ISO 2725 - 1

Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- polished
- made according to standard ISO 2725-1 (only metric dimension)
- made according to standard DIN 3124



		L	D1	D2	T↑		
605307	8	38	13.2	22.9	12	55	
610155	9	38	13.9	22.9	12	55	
600851	10	38	15	22.9	12	55	
600852	11	38	16.3	22.9	12	55	
600853	12	38	17.9	22.9	12	65	
600854	13	38	18.8	22.9	12	65	
600855	14	38	19.7	22.9	12	65	
600856	15	38	20.4	22.9	12	65	
600857	16	38	22.9	21.5	12	85	
600858	17	38	24.3	22	12	95	
600859	18	38	25.5	23	12	100	
600860	19	38	26.8	24	14	105	
600861	20	38	28.1	24	14	115	
600862	21	38	29.3	25	14	128	
600863	22	38	30.4	25	14	142	
600864	23	40	31.7	26	14	147	
600865	24	42	33.1	28	16	165	
600866	25	42	34.2	29	16	126	
600867	26	42	35.3	30	16	126	
600868	27	43	37	30	18	180	
600869	28	43	38	31	20	185	
610156	29	43	39	32	20	185	Till end of stock
600871	30	46	40.7	34	22	195	
600872	32	46	43.2	36	22	237	
610105	5/16"	38	13.2	22.9	12	55	
610106	3/8"	38	15	22.9	12	55	

		L	D1	D2	T↑		
610107	7/16"	38	16.3	22.9	12	55	
610108	1/2"	38	18.8	22.9	12	65	
610109	9/16"	38	20.4	22.9	12	65	
610110	5/8"	38	22.9	21.5	12	85	Till end of stock
610111	11/16"	38	25.5	23	12	95	
610112	3/4"	38	26.8	24	14	105	
610113	13/16"	38	29.3	25	14	128	Till end of stock
610114	7/8"	40	31.7	26	14	142	
610115	15/16"	42	33.1	28	16	165	
610116	1"	42	35.3	30	16	126	
610117	1.1/16"	43	37	30	18	180	
610118	1.1/8"	43	39	32	20	185	
610119	1.3/16"	46	40.7	34	22	237	
610120	1.1/4"	46	43.2	36	22	55	

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Frequently asked questions

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.